

3M™ Protecta® Safety Harness with Horizontal Leg Straps, 2 Attachment Points and Rescue

Part number(s):

1161238 Small (S)

1161239 Medium/Large (M/L)

X-Large (XL)

Description


Sub-brand:	Protecta®
Industry:	<ul style="list-style-type: none"> Construction, General Industry, Utility, Mining, Transportation, General Manufacturing
Applications:	<ul style="list-style-type: none"> Fall arrest Confined Space/Rescue Vertical ladder climbing

Features

Rear fall arrest attachment point:	<ul style="list-style-type: none"> Large D-ring – Steel - zinc plated black electro-deposition paint
Front fall arrest attachment point:	<ul style="list-style-type: none"> Standard D-ring – Steel - zinc plated black electro-deposition paint
Rescue attachment point:	<ul style="list-style-type: none"> Standard D-ring – Steel - zinc plated black electro-deposition paint
Buckles:	<ul style="list-style-type: none"> Leg, Chest – Quick Connect – Aluminium/Steel - zinc plated, black electro-deposition paint
Adjustment:	<p>Torso, legs</p> <ul style="list-style-type: none"> Torso: Spring adjuster – Steel - zinc plated black electro-deposition paint
Webbing:	45 mm polyester - water & dirt resistant
Thread:	Polyester
Additional features:	<ul style="list-style-type: none"> Front and rear fall indicators 2x Auto-resetting lanyard keepers Hook and loop web ends Protected labels Articulated rings
Weight capacity:	140 kg
Operating temperature:	-35°C +57°C
Standards:	CE EN361:2002 EN1497:2007



3M Protecta Fall Arrest Harness sizing chart

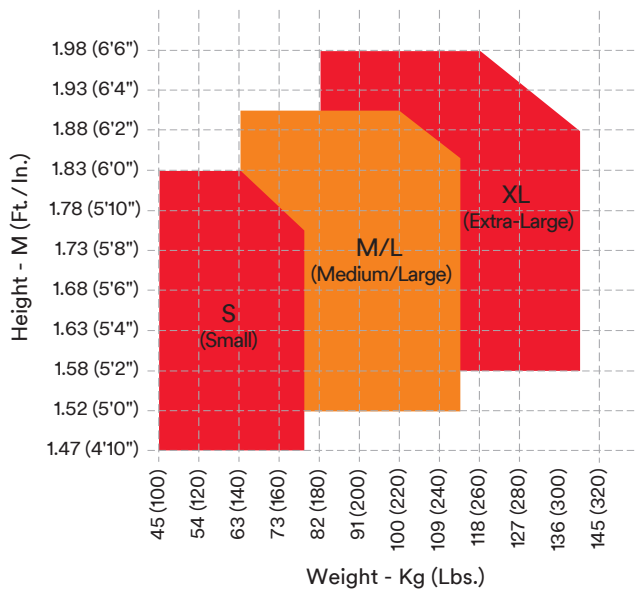

Weight

	←.....→	⚖️ kg
1161238	Small (S)	1.68
1161239	Medium / Large (M/L)	1.91
1161240	X-Large (XL)	2.04

Important Notice

The mounting and use of the product described within this document assumes that the user has previous experience of this type of product and that it will be assembled by a competent professional according to product documentation. Before any use of this product it is recommended to complete some trials to validate the performance of the product within its expected application.

All information and specification details contained within this document are inherent to this specific 3M product and would not be applied to other products or environment. Any action or usage of this product made in violation of this document is at the risk of the user.

Compliance to the information and specification relative to the product contained within this document does not exempt the user from compliance with additional guidelines (safety rules, procedures). Compliance to operational requirements especially in respect to the environment and usage of tools with this product must be observed. The 3M Group (who cannot verify or control these elements) would not be held responsible for the consequences of any violation of these rules which remain external to its decision and control.

Warranty conditions for products are determined with the sales contract documents and with the mandatory and applicable law, excluding any other warranty or compensation.



Phone: +33 (0)4 83 58 08 08
 Email: informationfallprotection@mmm.com
 Web: 3M.com/FallProtection

3M is a trademark of 3M Company. Capital Safety and Pro™ are trademarks of D B Industries, LLC.
 Protecta® is a trademark of Capital Safety Group EMEA.

Delegación Norte
 Pol. Ind. La General, pab. 12A
 48510 Trapagaran (Bizkaia)
 Tel. 94 472 31 13
 Email: bilbao@garsansianor.com

Delegación Centro
 Luis I, nº 72 (Pol. Ind. Vallecas)
 28031 Madrid
 Tel. 91 777 86 57
 Email: madrid@garsansianor.com