

3M™ Protecta® Temporary Sliding Beam Anchor


Part Number(s): 2104704

Product Type: Anchorage

Temporary Anchorage Point

Description

Sub-brand:	Protecta®
Industry:	Construction
Applications:	<ul style="list-style-type: none"> • Bridge work • Buildings • Warehouses • Arenas • Parking Ramps

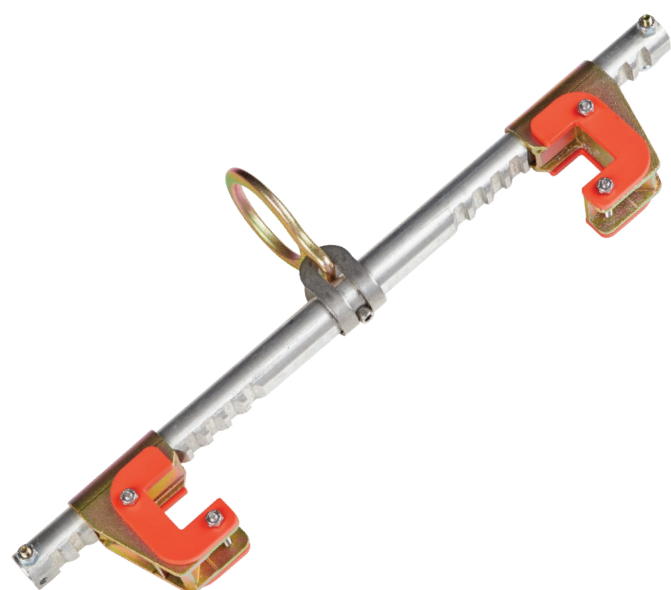

Features

Body:	<ul style="list-style-type: none"> • Material: Aluminium bar with steel end clamps • Breaking Strength: 22 kN
Connection Point:	<ul style="list-style-type: none"> • Type: Rotating D-ring • Material: Steel with zinc plating
Fixing Option:	Clamps down on beam flange
Weight Capacity:	140 kg
Compatible Structure:	Beam Size Limitations. Suitable for: 8.9 cm - 35.6 cm wide beam with flange thickness of 3.2 cm max
Number of Users:	1 user
System Breaking Strength:	> 12 kN for CE
Net Weight:	2.04 kg
Operating Temperature:	-40°C +54°C
Standards:	EN795:2012 Type B